


SY BS standard roller chains are standardized in accordance with ISO 606 B and fully interchangeable with chains manufactured according to BS 228 and DIN 8187.

Supplied, in rivet type, to European countries as well as replacement on machinery employing BS standard chains.

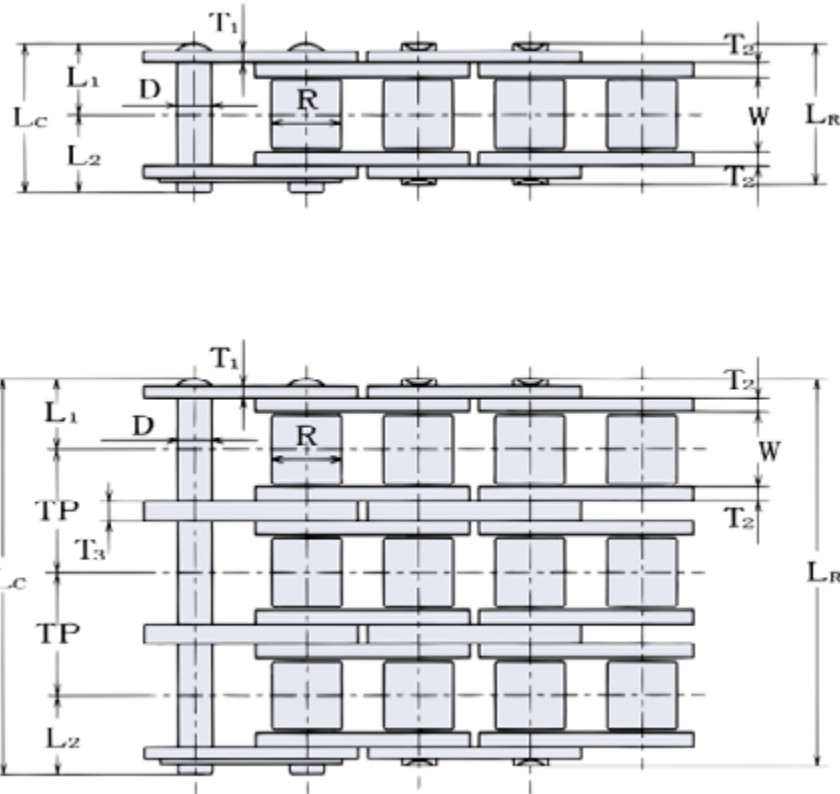

## 04, 05B & 06B

SY Chain No. (BS)	Dimensions - mm													Average Ultimate Strength Kn	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch P	Bushing		Pin				Plate			Trans. Pitch TP					
		Width W	Dia. R	Dia. D	Length		Height H	Thick.								
				LR	LC	L1	L2		T1	T2	T3					
04	6	2.8	4	1.85	-	-	-	-	-	-	-	-	-	-	-	-
05B	8	3	5	2.31	-	-	-	-	-	-	-	-	-	-	-	-
05B-2					-	-	-	-	-	-	-	-	-	-	-	-
06B	9.525	5.72	6.35	3.28	12.6	13.4	6.3	7.1	8.2	1.0	1.25	1.6	10.24	8.92	1.7	0.41
06B-2					22.9	23.7								16.9	2.9	0.78
06B-3					33.2	33.7								24.9	4.2	1.18