


ISO-B Series roller chains, conforming to ISO 606-B, are available for Europe-built equipment.

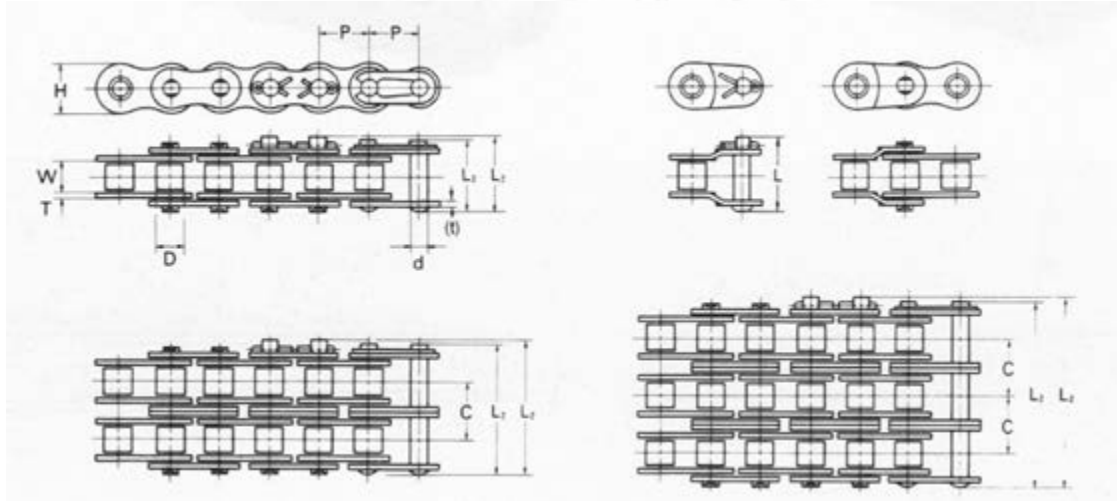

KCM Chain No.	Pitch P	Width between Inner Plates W	Roller Dia. D	PIN			Link Plate		Transversion pitch C	ISO 606 Min. Tensile Strength kN (kgf)	KCM Min. Tensile Strength kN (kgf)	Approx. Weight (kg/m)	Links of Dia. 1 unit				
				Diameter d	L2	Offset L	Thickness T	Heights H									
04	6	2.8	4	1.85	7.35	-	0.6	4.9	-	-	3.2(330)	0.11	834				
05B	8.00	3	5	2.31	8.60	-	0.75	7.1	5.64	4.4(449)	4.9(500)	0.18	626				
05B-2					14.25	-								7.8(800)	8.5(870)	0.31	
06B*	9.525	5.72	6.35	3.28	13.60	15.15	1.3	8.1	10.24	8.9(910)	9.0(920)	0.39	320				
06B-2					23.85	25.40								(1.0)	16.9(1,720)	17.0(1,730)	0.74
06B-3					34.10	35.65								24.9(2,540)	24.9(2,540)	1.10	
08B*	12.7	7.75	8.51	4.45	18.05	19.2	1.6	11.7	13.92	17.8(1,820)	18.9(1,930)	0.65	240				
08B-2					31.95	33.10								31.1(3,170)	32.0(3,260)	1.25	
08B-3					45.90	47.05								44.5(4,540)	47.5(4,840)	1.85	
10B*	15.875	9.65	10.16	5.08	20.15	21.5	1.5	14.6	16.59	22.2(2,260)	22.9(2,340)	0.91	192				
10B-2					36.95	38.10								44.5(4,540)	44.5(4,540)	1.80	
10B-3					53.35	54.70								66.7(6,800)	66.8(6,810)	2.70	
12B*	19.05	11.68	12.07	5.72	23.60	26.30	1.8	16	19.46	28.9(2,950)	31.0(3,160)	1.24	160				
12B-2					43.05	45.75								57.8(5,890)	61.0(6,220)	2.44	
12B-3					62.50	65.20								86.7(8,840)	92.2(9,400)	3.65	
16B	25.4	17.02	15.88	8.28	38.10	41.45	4.0	19.7	31.88	60(6,120)	69.6(7,100)	2.62	120				
16B-2					70.00	73.35								(3.2)	106(10,810)	127.5(13,000)	5.18
16B-3					101.90	105.25								160(16,320)	192.2(19,600)	7.74	
20B	31.75	19.56	19.05	10.19	43.95	47.25	4.5	26	36.45	95(9,690)	98.1(10,000)	3.81	96				
20B-2					80.40	83.70								(3.5)	170(17,340)	197.1(20,100)	7.52
20B-3					116.85	120.15								250(25,490)	295.2(30,100)	11.24	
24B	38.1	25.4	25.4	14.63	58.70	4.20	6.0	33	48.36	160(16,320)	166.7(17,000)	6.65	80				
24B-2					107.05	112.55								(5.0)	280(28,550)	334.4(34,100)	13.11
24B-3					155.40	160.90								425(42,340)	500.1(51,000)	19.57	
28B	44.45	31	27.94	15.88	-	-	-	-	-	-	-	-	-				
28B-2					-	-	-	-	-	-	-	-	-	-	-		
32B	50.8	31.00	29.21	17.81	-	-	-	-	-	-	-	-	-				
32B-2					-	-	-	-	-	-	-	-	-	-	-		
32B-3					-	-	-	-	-	-	-	-	-	-	-		

* Stocked in 100ft and 50ft reels.

Dimensions (Millimeters)

Every effort has been taken to ensure that the data listed in this catalogue is correct. Finer Power Transmissions P/L will not accept liability for any damage or loss caused as a result of the data in this catalogue.