
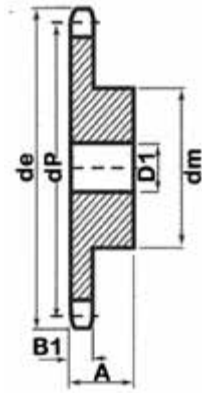


60-1 Sprocket



Pinions	mm
Tooth Radius r3	20
Radius Width C	2.4
Tooth Width B1	11.6

Chain	mm
Pitch	19.05
Inside	12.7
Roller ϕ	11.91

Teeth	de	dp	Simplex			
			dm	D1	A	App. Kg
9	64.0	55.70	37	12	30	0.35
10	70.0	61.64	42	12	30	0.41
11	76.0	67.61	46	16	35	0.53
12	81.9	73.6	52	16	35	0.67
13	87.9	79.59	58	16	35	0.75
14	94.0	85.61	64	16	35	0.91
15	100.0	91.63	70	16	35	1.14
16	106.0	97.65	75	16	35	1.27
17	112.0	103.67	80	16	35	1.46
18	118.0	109.71	80	16	35	1.69
19	124.1	115.75	80	16	35	1.78
20	130.1	121.78	80	16	35	2.10
21	136.2	127.82	80	16	35	2.10
22	142.2	133.86	90	20	40	2.38
23	148.2	139.90	90	20	40	2.49
24	154.3	145.94	90	20	40	2.62
25	160.3	152.00	90	20	40	2.78
26	166.4	158.04	95	20	40	2.89
27	172.4	164.09	95	20	40	3.05
28	178.5	170.13	95	20	40	3.12
29	184.5	176.19	95	20	40	3.30
30	190.6	182.25	95	20	40	3.44
32	202.7	194.35	95	20	40	3.75
34	214.8	206.46	95	0A	40	3.99
38	239.0	230.69	100	25	40	4.92
40	251.1	242.81	100	25	40	5.22